WINDLOAD PRESSURE FOR WINDOWS, DOORS AND PANELS. (POUNDS PER SQUARE FOOT)

AREA	POSITIVE		NEGATIVE	
	ZONE 4	ZONE 5	ZONE 4	ZONE 5
0 TO 25 S.F.	32.8	32.8	-35.6	-43.9
25 TO 50 S.F.	30.8	30.8	-33.6	-40.0
> 50 S.F.	29.4	29.4	-32.1	-37.0

NOTES:
1. ZONE 5 IS DEFINED AS ANY DOOR OR WINDOW IN THE CORNER ZONE. ALL OTHER LOCATIONS ARE DEFINED AS ZONE 4
2. CORNER ZONE DISTANCE "a"=6.0'

1 NOT USED
S-1.00 SCALE: 3/16" = 1'-0"

2 NOT USED
A-5.04 SCALE: 1/2" = 1'-0"



WINDOW NOA:
NO. 14-0722.08



WINDOW NOA:
NO. 14-0722.08

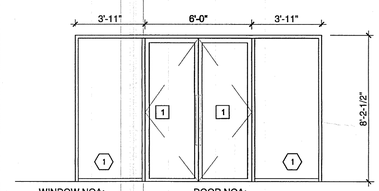

WINDOW NOA:
NO. 15-0826.26

DOOR NOA:
NO. 15-0602.09
(TYPICAL ELEVATION 'XX')



DOOR NOA:
NO. 15-0602.09
(TYPICAL ELEVATION 'XX')



WINDOW NOA:
NO. 15-0826.26

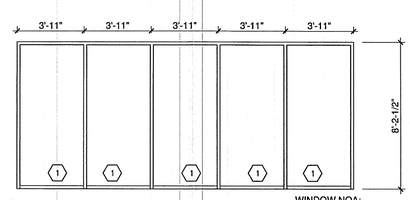

WINDOW NOA:
NO. 15-0826.26

NOTES:
CONTRACTOR TO **VERIFY IN FIELD** ALL DOOR & WINDOW MEASUREMENTS PRIOR TO ORDER & INSTALLATION AND PROVIDE SHOP DRAWINGS FOR APPROVAL.

4 STOREFRONT DOOR & WINDOW ELEVATIONS
S-1.00 SCALE: 1/4" = 1'-0"

5 NOT USED
S-1.00 SCALE: 1-1/2" = 1'-0"

A-5.04 SCALE: 1" = 1'-0"

Miami Dade County Department of Regulatory And Economic Resources - Job Copy
0001085063 - 12/21/2017 3:20:23 PM
S-1.00-12132017.PDF
Examiner Date Time Stamp Disp. Trade Stamp Name
Carlos Labiste 12/14/2017 3:09:26 PM A STRU Approved
Carlos Labiste 12/14/2017 3:10:15 PM I STRU Windows

KReL DESIGN

DOCUMENT COORDINATOR

KReL DESIGN LLC
3046 INDIANA STREET
MIAMI, FLORIDA 33133
(305) 666-2450

CIVIL/STRUCTURAL ENGINEER

CHARLES C. MITCHELL, P.E.
CIVIL/STRUCTURAL # 11127
924 NORTH FEDERAL HWY
HOLLYWOOD, FL 33022
(305) 336-5069

Seal:

CHARLES C. MITCHELL, P.E.
P.E. # 11127

Revisions:

Project Name:

STOREFRONT REPLACEMENT

10886 NE 6TH AVENUE
MIAMI, FL 33161

KEY PLAN

N

ISSUED FOR:

Comm. No.	201204-03.02
Scale:	AS SHOWN
Date:	11.20.17
Drawn:	
Checked:	
Draw'g Title:	

STOREFRONT & WINDOW ELEVATIONS & NOTES

Sheet No.

S-1.00